



PRO • 1050

RIBCRAFT DEEP-V HULL™

The Ribcraft 10.5 PRO delivers the ultimate offshore response. It features Ribcraft's signature deep V hull and bow sheer with an extended waterline and generous beam for exceptional seakeeping and a dry ride. Its generous 3-meter beam ensures stability for long passages and heavy payloads.

Highly customisable with center console for an open layout, micro cabin or even a fully enclosed cabin, the 10.5m PRO adapts to any mission. Twin, triple outboards, or sterndrives/jets provide tailored power, while robust construction and thorough testing guarantee unwavering reliability. All Ribcraft models feature heavy duty Hypalon™ inflatable tubes.




| SPECIFICATIONS: | | | | | APPLICATIONS: |
|-------------------------------|--------------------------------------|-------------------------------|-----------------------------|------------------------------------|---|
| 10.5 Meters Overall Length | 3.0 Meters Overall Beam | 9.5 Meters Internal Length | 2.0 Meters Internal Beam | DOSPEC Weight | <ul style="list-style-type: none"> • Search & Rescue • Marina Operations • Special Operations • Police Patrol • Commercial |
| 550 mm Tube Diameter | Hypalon 1100 Dtx Tube Material | 200 HP Minimum | 700 HP Maximum | 16 Maximum Number Of Persons | |



PRO • 1050

| RPM | 1000 | 1500 | 2000 | 2500 | 3000 | 3500 | 4000 | 4500 | 5000 | 5500 | 6000 |
|--------------------------|------|------|------|------|------|------|------|------|-------|------|------|
| Speed (Knots) | 4.40 | 6.80 | 8.90 | 12.8 | 20.8 | 24.2 | 25.0 | 26.8 | 29.5 | 32.0 | 37.0 |
| Litres Per Hour | 7.90 | 15.6 | 20.5 | 28.9 | 49.2 | 58.7 | 68.3 | 92.4 | 128.4 | 165 | 202 |
| Litres Per Nautical Mile | 1.80 | 2.29 | 2.30 | 2.26 | 2.37 | 2.43 | 2.73 | 3.45 | 4.35 | 5.16 | 5.95 |

*Test Data from Ribcraft 10.5 m Pro. Engine: Twin 300hp Outboard. Fuel Tank Capacity: Twin 250 litre. Weight: 3000kgs approx.

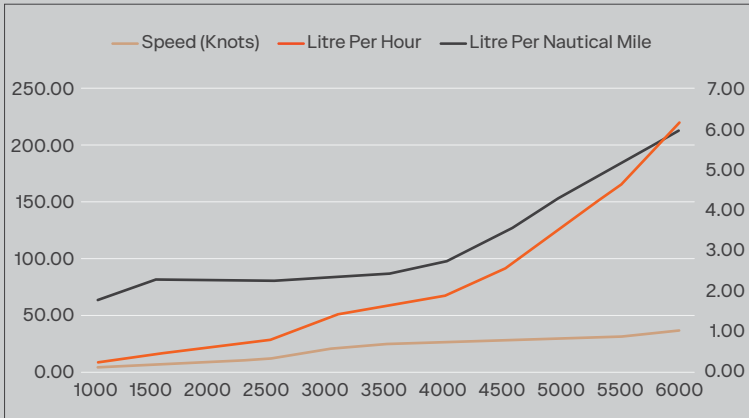

*Image of actual boat used in Test Data.



KEY STANDARD FEATURES:

- Ribcraft Advanced Deep V Hull (GRP)
- Commercial Specification Hypalon Inflation Tubes
- 9 x Over Pressure Release Valves, One per Chamber
- Heavy Duty 'D' Rubbing Strake Fendering
- Anti-slip Decking Finish
- Anchor Locker, Hatch and Tie off Cleat
- Touring/ Patrol/ Police Console
- Additional Single/ Double/ Suspension Seat
- Layout Options: Open/ Micro Cabin/ Wheelhouse
- Internal Twin Fuel Tank
- Recommended Engine: Twin 250 hp

LAYOUT OPTION 1

Touring double console with 14 x One person jockey seats.



LAYOUT OPTION 2

DP double console with 14 x One person jockey seats.



LAYOUT OPTION 3

Touring double console, 2 x One person jockey seats, 5 x Sea safari bench seats.

