




# PRO • 680

RIBCRAFT DEEP-V HULL™

The Ribcraft 6.8 PRO is a commercial foul-weather RIB renowned for its exceptional reliability in the harshest sea conditions. Its long, steep sheer towards the bow and a robust 2.7-meter beam make it a true workhorse on the water.

Its cross-linked inner matrix hull construction provides exceptional strength, while under-deck fuel tanks optimise space and lower the center of gravity, enhancing trim and handling. With its ability to undertake extended cruises and carry increased loads, the Ribcraft 6.8 PRO excels in rescue missions and patrol duties.

Designed for versatility, the Ribcraft 6.8 PRO can be fully customised to meet the demands of patrol, commercial, or rescue operations. It offers a variety of power options, including outboard and inboard stern drives, enabling long-distance cruising, agile maneuvers, and heavy payloads.

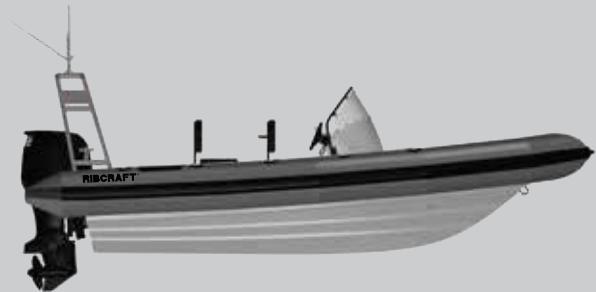


SPECIFICATIONS:					APPLICATIONS:
6.8 Meters Overall Length	2.7 Meters Overall Beam	5.4 Metres Internal Length	1.7 Meters Internal Beam	DOSPEC Weight	<ul style="list-style-type: none"><li>• Search &amp; Rescue</li><li>• Coaching &amp; Support</li><li>• Marina Operations</li><li>• Special Operations</li><li>• Recreational</li></ul>
530 mm Tube Diameter	Hypalon 1100 Dtx Tube Material	125 HP Minimum	200 HP Maximum	12 Maximum Number Of Persons	



# PRO • 680

RPM	1000	1500	2000	2500	3000	3500	4000	4500	5000	5500	6000
Speed (Knots)	4.50	5.50	7.00	9.60	17.0	22.0	25.5	30.5	36.5	40.5	45.0
Litres Per Hour	3.70	6.06	10.2	14.4	17.0	23.8	29.0	35.0	41.0	51.0	58.0
Litres Per Nautical Mile	0.82	1.10	1.46	1.50	1.00	1.08	1.14	1.15	1.12	1.26	1.29

\*Test Data from Ribcraft 6.8 m Pro. Engine: Single 200hp Outboard. Fuel Tank Capacity: Single 225 litre. Weight: 1350kgs approx.

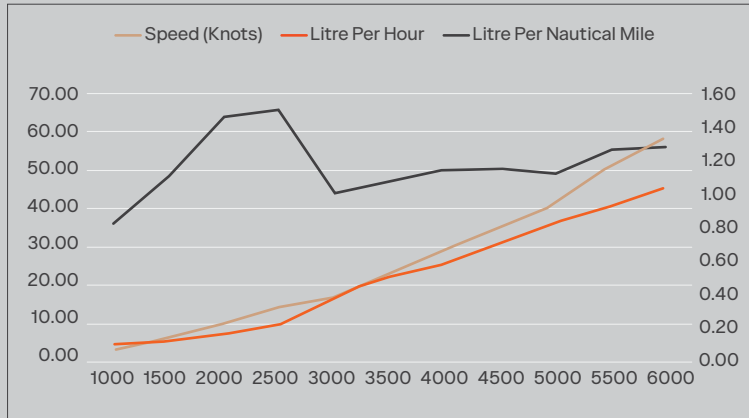

\*Image of actual boat used in Test Data.



## KEY STANDARD FEATURES:

- Ribcraft Advanced Deep V Hull (GRP)
- Commercial Specification Hypalon Inflation Tubes
- 5 x Over Pressure Release Valves, One per Chamber
- Heavy Duty 'D' Rubbing Strake Fendering
- Anti-slip Decking Finish
- Anchor Locker, Hatch and Tie off Cleat
- Single/ Pacific/ Offshore Console
- Additional Single/ Double/ Suspension Seat
- Internal Fuel Tank
- Recommended Engine: 150 hp

## LAYOUT OPTION 1

Pacific double console with 4 x One person jockey seats.



## LAYOUT OPTION 2

Pacific double console with 6 x One person jockey seats.



## LAYOUT OPTION 3

Pacific double console with 4 x One person jockey seats, 2 x Two person jockey seats.

